

Airport**Lighting**Company  
An ISO 9001:2015 Certified Company

# OWNER'S MANUAL



Medium Intensity Elevated Edge Light

L-861

L-861T

L-861E



# Medium Intensity Elevated Edge Light L-861/L-861T/ L-861E Owner's Manual

**ETL Certified Conformance with:**  
Certified to FAA AC 150/5345-46 (Current Edition)



**Manufactured by:**  
**Airport Lighting Company**  
108 Fairgrounds Drive  
Manlius, New York 13104  
(315) 682-6460

Email: [info@airportlightingcompany.com](mailto:info@airportlightingcompany.com)  
Website: [www.airportlightingcompany.com](http://www.airportlightingcompany.com)

## Medium Intensity Elevated Edge Light L-861, L-861T, L-861E



### Compliances (Current Editions)

FAA: AC 150/5345-46, ETL Certified



### Application

Taxiway Edge, Runway Edge, Apron Edge, Threshold/End Non Precision Instrument Flight Rules, Displaced Threshold

### Key Features

- ETL Certification ensures performance
- One piece housing for easy leveling
- Durable powder coat finish lasts longer
- Threaded 1.5" frangible coupling or optional 2" matches existing baseplates/stakes
- Actual average lamp life far exceeds 1000 hour rated life for fewer lamp changes
- Easy lamp changes with weatherproof clamp and gasket system
- Also available in 120V for economical initial installation
- Available in increased heights for inclement weather visibility

### General Catalog Numbers

216-□□-□-□□-□□-□

**Wattage**  
30 = 30W *L-861T Only*  
40 = 40W 120V\*  
45 = 45W

**Lamp Type**  
Q = Quartz  
I = Incandescent\*  
V = Voltage\*  
*\*Not ETL Certified*

**Colors**  
C = Clear  
Y = Yellow  
R = Red  
G = Green  
B = Blue  
O = Opaque

**Overall Height**  
14 = 14"  
20 = 20"  
24 = 24"  
30 = 30"  
*Other heights available*

**Option**  
2 = Frangible coupling with 2" thread for 1" dia. column

*Example: 216-45-Q-CY-24 is a 216 fixture with 45 Watt Quartz lamp, clear/yellow lens and 24" overall height*



## Parts

### Head Assemblies

Includes housing, socket, cord, gasket and lens clamp

216-XX Incandescent

216Q-XX L-861, L-861T - 1-5/8"  
Standoff 99-00305 Quartz

216QE-XX L-861E - 1-3/4"  
standoff 99-00013 Quartz

X = Overall height of fixture - 14", 20", 24" or 30" - other heights available

### Lamp Sockets

73-P Incandescent

73-Q Quartz

### Connector Cords

766-X Incandescent

766Q-X Quartz

X = Overall height of fixture - 14", 20", 24" or 30" - other heights available

### Lenses

50 Green

51 Blue

52 Red

54 Yellow

249 Clear

250 Clear/Green

251 Clear/Red

252 Green/Opaque

253 Green/Yellow

254 Red/Yellow

255 Clear/Yellow

256 Red/Green

### Columns


77 6" (14" overall height of fixture)

78 12" (20" overall height of fixture)

78-16 16" (24" overall height of fixture)

79 22" (30" overall height of fixture)

Other heights available.

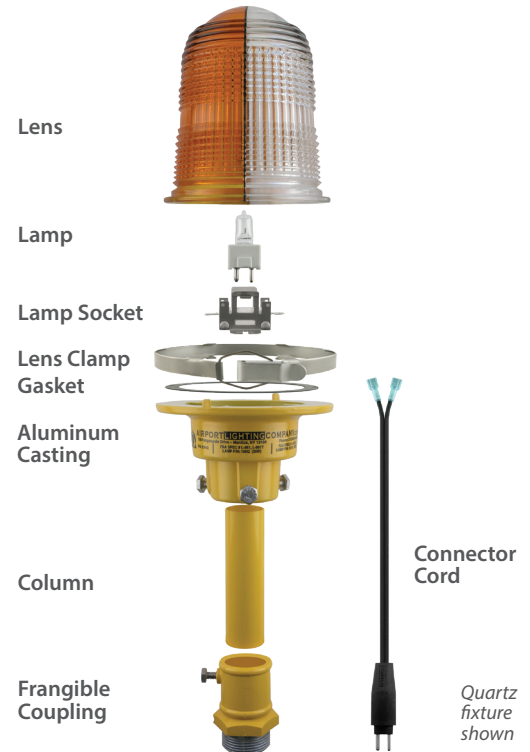

### Lamps

100 30W Incandescent

101 45W Incandescent

100Q 30W Quartz

101Q 45W Quartz

### Accessories

34-030666 L-830-1 30/45W Transformer

82-D4 L-823 Primary Connector Kit - #8 AWG

71 L-867B 12" diameter base plate w/ 1.5" hub

72 L-867B 12" diameter base plate w/ 2" hub

### Other

61 Lens Clamp

62 Lens Gasket

58 Frangible Coupling  
1.5" thread for 1" dia. column

58-2 Frangible Coupling  
2" thread for 1" dia. column

# TABLE OF CONTENTS



Airport**Lighting**Company  
An ISO 9001:2015 Certified Company

<b>How to Get Help</b> .....	<b>1</b>
<b>Warranty</b> .....	<b>2</b>
<b>Installation Instructions</b> .....	<b>2</b>
<b>Maintenance</b> .....	<b>2</b>
<b>Notes</b> .....	<b>3</b>



## Have Questions? Contact Us:




**PHONE:** (315) 682-6460



**EMAIL:** [info@airportlightingcompany.com](mailto:info@airportlightingcompany.com)



**WEBSITE:** [www.airportlightingcompany.com](http://www.airportlightingcompany.com)

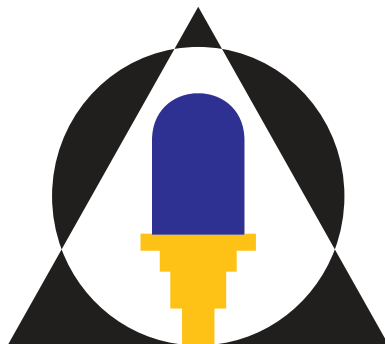

Airport**Lighting**Company

An ISO 9001:2015 Certified Company

**108 Fairgrounds Drive  
Manlius, New York 13104**



## Warranty

Airport Lighting Company warrants that the equipment has been manufactured and will perform in accordance with applicable specifications and that any defect in design, materials, (excluding lamps), or workmanship which may occur during proper and normal use during a period of 1 year from date of installation or at least 2 years from date of shipment will be corrected by repair or replacement by the manufacturers f.o.b. factory.

## Installation Instructions

The fixture ships from Airport Lighting Company ready to be plugged into a 30/45W isolation transformer with a 6.6amp secondary. Install the lamp using care not to let your skin contact the glass of the lamp. Remove the clamp band, install the lens by aligning the notches of the glass with the bosses on the casting, and replace the clamp band. Snake the cord through the column and frangible coupling. Secure the column to the frangible coupling, tightening to 30 in lbs. Plug the fixture into the isolation transformer secondary. Thread the frangible coupling onto the baseplate. If the lens is bidirectional, rotate the fixture until the division between the glass is perpendicular to the pavement. Place a torpedo level along the bottom edge of the light fixture base. Using the (3) ¼"-20 hex screws in the base of the fixture adjust the screws until the light fixture is level and tighten to 30 in lbs.

## Maintenance

As part of the lamp replacement process, wipe the lens clean inside and out. Check that bidirectional fixtures are aligned properly to the pavement.

