

L-823 Primary Connector Kits

Certified to FAA AC 150/5345-26 (Current Edition)


These kits provide secure connections in critical applications.



Specifications

- Manufactured by Amerace or Integro
- Electrical rating - 25 Amps, 5000 Volts
- Constructed of rugged thermoplastic rubber for long-lasting, reliable service
- Every kit filled with silicone for maximum moisture protection

How to Order

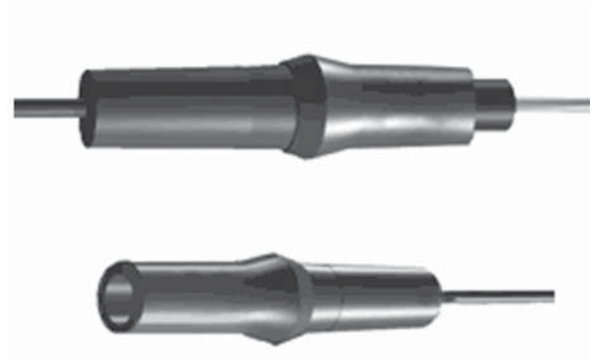

To specify the proper kit:

Using a letter from **Table 1** and then a number from **Table 2**, describe first the plug and then the receptacle.

Example: A kit designed for use with a cable diameter of .34" and #8 stranded wire would be **D4-D4**.

Table 1		
Cable Outside Diameter		Size Code
Minimum	Maximum	
.195"	.260"	B
.250"	.330"	C
.320"	.430"	D
.370"	.507"	Z
.420"	.585"	E
.575"	.785"	F

Table 2		
Wire Size (AWG) and Type		Size Code
Concentric Stranded	Solid	
10-12	8-10	6
8	6	4
6	4	3
4	-	2
2	-	1