

L-823 Secondary Connector Kits

Certified to FAA AC 150/5345-26 (Current Edition)

These kits provide secure connections in critical applications.



Specifications

- Manufactured by Amerace
- Constructed of rugged thermoplastic rubber for long-lasting, reliable service

How to Order

To specify the proper part:

Use a prefix and letter from **Table 1** and then a number from **Table 2**.

Example: A plug designed to terminate (2) single conductors with diameters of .205" and #8 stranded wire would be **90P-A4**.

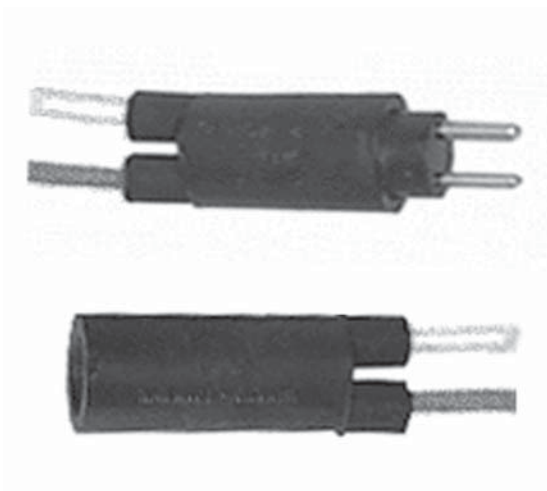


Table 1			
Cable Outside Diameter		Prefix	Size Code
Minimum	Maximum		
.120"	.160"	90P/R* (2 single conductors)	S
.155"	.205"		A
.195"	.260"		B
.250"	.330"		C
.320"	.430"	91P/R* (2 core cables)	D
.420"	.585"		E
.575"	.785"		F

Table 2		
Wire Size (AWG) and Type		Size Code
Concentric Stranded	Solid	
14-16	12-14	8
10-12	8-10	6
8	6	4

*P = Plug
R = Receptacle