

Reflective Marker



Compliances (Current Editions)

FAA: AC 150/5345-39, ETL Certified



Application

Retroreflective airport markers are used to mark airport taxiways, runway edges, ends and thresholds


Key Features

- Self-erecting when struck by a vehicle
- Resistant to ultraviolet light, ozone, and hydrocarbons
- Polypropylene post remains dimensionally stable from -4° F (brittleness point) to 329° F (melting point)
- Ground driven posts are capable of being mowed over by a standard DOT flail or sickle mower (special attachment required)
- Manufactured in the USA by Flexstake

Specifications

- Height: 14", 19", 24", 30", 36"*
- Anchor: Soil Anchor, 18"
- Mounting Base: 8" Diameter
- Post: 3.25" Diameter
- Weight: 2.5 lbs (approximate)
- Post colors: White, blue or yellow
- Reflective colors: 14" wrap for top of post available in blue, white, red, yellow, orange, or green reflective sheeting (custom colors available)

General Catalog Numbers

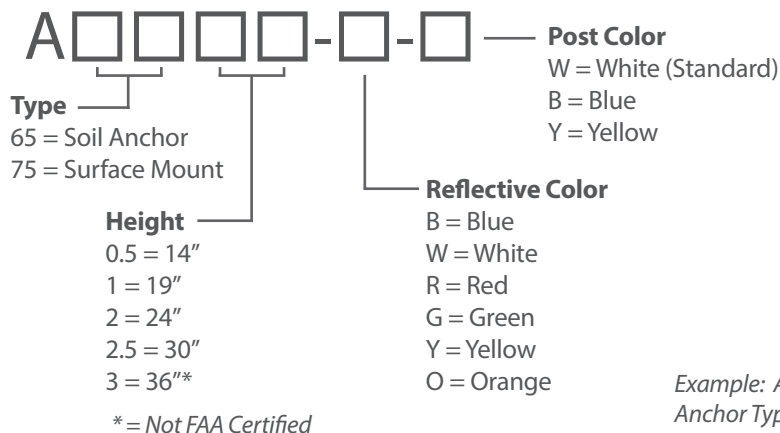

Example: A650.5-B-B is an L-853 Soil Anchor Type 14" OAH Blue with Blue Post