

I-Lux Guidance Sign LED



All FAA Sizes, FAA Types
and FAA Styles are available in LED



Compliances (Current Editions)

FAA: AC 150/5345-44; Engineering Brief No. 67, ETL Certified




Key Features

- The average LED life is 100,000 hours high intensity / 180,000 hours under typical operating conditions.
- Easily replace traditional L-858 signs
- Solidly & seamlessly integrate off-the-shelf parts and custom fabrication for strength & flexibility while minimizing operating costs
- Platform for cabinet machined from solid, heavy-gauge aluminum construction
- Free of gaps and joints that weaken modular signs and allow penetration of wind, rain, dirt and snow
- Inherently stronger than modular signs because it doesn't rely on the strength of hardware used to piece modular signs together
- I-Lux is as short as possible because it is made per FAA lettering specifications & not artificially lengthened over seams and gaps
- AGM's I-Lux is the only airfield sign available in half module sizing
- Quick and economical installation, with smaller excavation, less concrete, and fewer legs to bolt to the pad
- Smaller obstruction in the field than modular signs, presenting less inertial load on aircrafts should a collision occur
- Seamless panels display messages without distortion
- Highly impact resistant, up to 30 times more than other brands
- No tools required for re-lamping
- Base model brightness controls use technology that has been proven for years in the field



Specifications

General Catalog Numbers

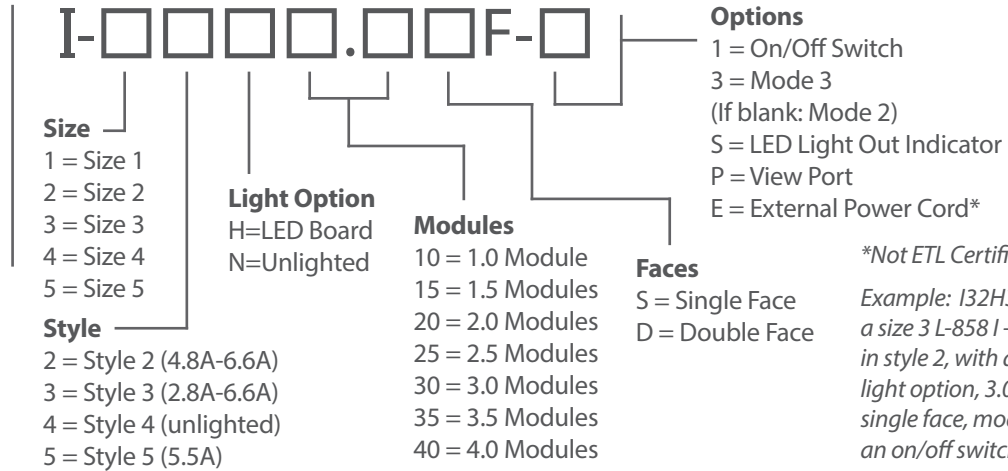

*Not ETL Certified

Example: I32H30.0SF-1 is a size 3 L-858 I-Lux sign in style 2, with an LED light option, 3.0 modules, single face, mode 2 with an on/off switch

Replacement Parts (LED Light Option)

Part Number	Description
C7-LVCV2	Low voltage power control module
I7-LEDV2	LED board with optics
C7-DRVR	LED driver module
C7-BRG	Bridge rectifier

I-Lux Size 4 (LED Board Light Option)

Style	Modules	L-830 Transformer*	Primary Power Factor	Primary VA Load	Secondary Power Factor	Secondary VA Load
2	1.0	65W	49	.94	49	.94
3	1.0	65W	44	.94	44	.94
5	1.0	65W	44	.94	44	.94

Transformer Requirements: LED Board

Size	Style	Modules	L-830 Transformer*	Primary Power Factor	Primary VA Load	Secondary Power Factor	Secondary VA Load	# of LEDs
1	2	1.0	65W	0.94	41	0.95	27	2
1	2	1.5 & 2.0	65W	0.95	45	0.94	32	4
1	2	2.5 & 3.0	65W	0.95	49	0.94	35	6
2	2	3.5 & 4.0	65W	0.95	54	0.94	40	8
2	2	1.0	65W	0.95	45	0.95	32	4
2	2	1.5 & 2.0	65W	0.95	54	0.94	40	8

continued on next page



Specifications

Transformer Requirements: LED Board

Size	Style	Modules	L-830 Transformer*	Primary Power Factor	Primary VA Load	Secondary Power Factor	Secondary VA Load	# of LEDs
2	2	2.5 & 3.0	65W	0.94	63	0.93	50	12
3	2	3.5 & 4.0	100W	0.93	75	0.92	60	16
3	2	1.0	65W	0.94	48	0.94	36	6
3	2	1.5 & 2.0	65W	0.94	64	0.93	51	12
3	2	2.5 & 3.0	100W	0.93	78	0.92	65	18
5	2	3.5 & 4.0	100W	0.93	93	0.92	79	24
1	2	1.0	65W	0.94	41	0.95	27	2
1	3	1.5 & 2.0	65W	0.95	45	0.94	32	4
1	3	2.5 & 3.0	65W	0.95	49	0.94	36	6
1	3	3.5 & 4.0	65W	0.95	54	0.94	41	8
2	3	1.0	65W	0.95	45	0.95	31	4
2	3	1.5 & 2.0	65W	0.94	54	0.94	41	8
2	3	2.5 & 3.0	100W	0.93	64	0.93	49	12
2	3	3.5 & 4.0	200W	0.92	78	0.92	62	16
3	3	1.0	65W	0.94	48	0.94	36	6
3	3	1.5 & 2.0	100W	0.93	64	0.93	50	12
3	3	2.5 & 3.0	200W	0.92	82	0.92	65	18
3	3	3.5 & 4.0	200W	0.92	96	0.92	79	24
5	3	1.0	65W	0.95	32	0.94	23	2
1	3	1.5 & 2.0	65W	0.95	37	0.94	27	4
1	5	2.5 & 3.0	65W	0.94	41	0.93	32	6
1	5	3.5 & 4.0	65W	0.94	46	0.93	37	8
1	5	1.0	65W	0.95	37	0.94	28	4
2	5	1.5 & 2.0	65W	0.94	47	0.93	37	8
2	5	2.5 & 3.0	65W	0.93	56	0.92	46	12
2	5	3.5 & 4.0	100W	0.93	67	0.91	57	16
2	5	1.0	65W	0.93	67	0.91	57	6
3	5	1.5 & 2.0	65W	0.93	57	0.92	47	12
3	5	2.5 & 3.0	100W	0.92	71	0.91	62	18
3	5	3.5 & 4.0	100W	0.92	85	0.91	76	24

*Minimum