

L-861SE Medium Intensity Quartz Light

Certified to FAA AC 150/5345-46 Current Edition

Installed in lieu of other approach lighting aids such as PAPI, REIL, or LDIN.



Benefits

- ETL Certification ensures performance
- Easy lamp changes through thumbscrew system - no clamp band or inner/outer lens removal
- Available in increased heights for snow country visibility
- Threaded 1.5" frangible coupling or optional 2" matches existing baseplates/stakes
- Actual average lamp life far exceeds 1000 hour rated life for fewer lamp changes



General Catalog Numbers

| | | | |
|----------------------------|----------|-------------------------|----------------------|
| 216SE-□-120-□□-□□-□ | | | |
| | Wattage | | |
| Column Diameter | Colors | Overall Height | Option |
| 1=1" | C=Clear | 14=14" | 2=Frangible coupling |
| 2=2" | Y=Yellow | 20=20" | with 2" thread for |
| | R=Red | 24=24" | 1" dia. column |
| | G=Green | 30=30" | |
| | B=Blue | Other heights available | |
| | O=Opaque | | |

Example: 216SE-1-120-RG-24 is a 216SE fixture with 1" column, 120W lamp, red/green and 24" overall height

Head Assemblies

Includes housing, socket, cord, gasket and lens clamp.
 #216SE-X.....Quartz
 X = Overall height of fixture -14", 20", 24" or 30" - other heights available

Lamp Socket

#73Q.....Quartz

Outer Lenses

#249Q Clear
 #249Q-CO..... Clear/Opaque*
 *Used only on displaced thresholds

180° Inner Lenses

#57Q-B.....Blue
 #57Q-C Clear
 #57Q-G.....Green
 #57Q-R.....Red
 #57Q-Y.....Yellow

Lamps

#103..... 120W Quartz

Connector Cords


#76Q-X.....Quartz
 X = Overall height of fixture -14", 20", 24" or 30" - other heights available

Columns

#77 6" (14" overall height of fixture)
 #78 12" (20" overall height of fixture)
 #78-16..... 16" (24" overall height of fixture)
 #79 22" (30" overall height of fixture)
 Other heights available. Add -2 to any column part number for 2" column.

Other

#60Q..... Lens Clamp
 #63Q.....Lens Gasket

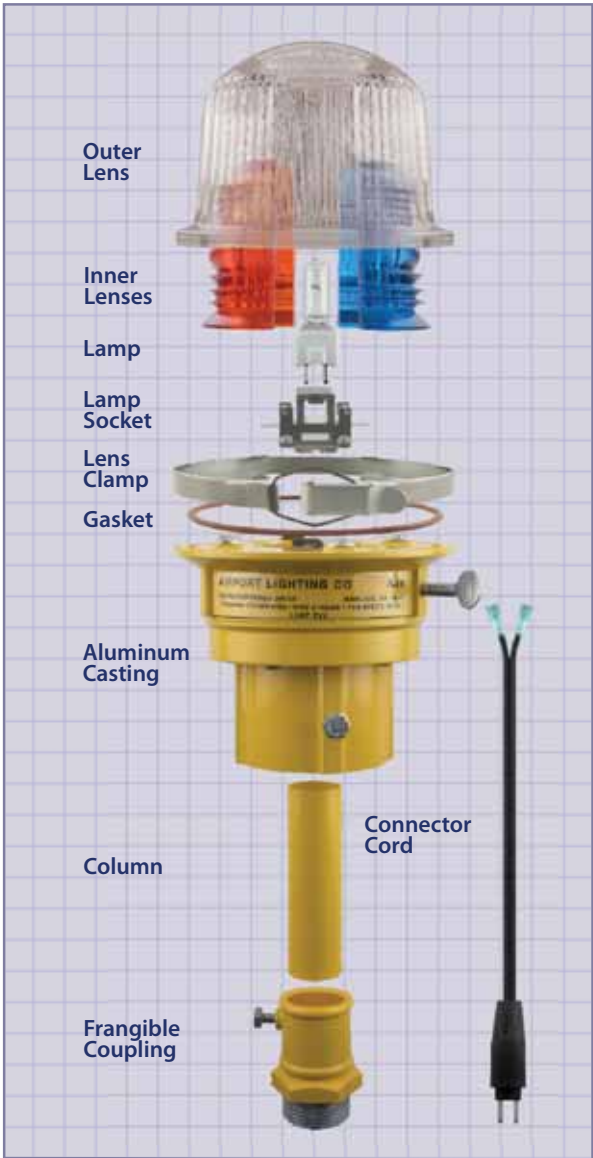

Other (con't)

#58 Frangible Coupling
 1.5" thread for 1" dia. column
 #58-2 Frangible Coupling
 2" thread for 1" dia. column
 #59 Frangible Coupling
 2" thread for 2" EMT column (14" overall height only)
 #59-E-P Frangible Coupling
 2" thread for 2" EMT column (overall heights greater than 14")

Accessories

L-830-4 100W Transformer
 L-823 Primary Connector Kit
 L-867B 12" diameter light base
 L-867B 12" diameter baseplate

