

# L-862 High Intensity Quartz Light

Certified to FAA AC 150/5345-46 Current Edition

*Installed to define edges of precision instrument runways.*



## Benefits

- ETL Certification ensures performance
- Easy lamp changes through thumbscrew system - no clamp band or inner/outer lens removal
- Durable powder coat finish lasts longer
- Threaded 1.5" frangible coupling or optional 2" matches existing baseplates/stakes
- Actual average lamp life far exceeds 1000 hour rated life for fewer lamp changes
- Available in increased heights for snow country visibility

Toe direction must be specified. Looking at the fixture from the runway centerline the color on the left is listed first, followed by the color on the right.



## General Catalog Numbers

213Q-□-□□□-□□-□□-□

<p><b>Column Diameter</b> 1=1" 2=2"</p>	<p><b>Colors</b> C=Clear Y=Yellow R=Red G=Green B=Blue O=Opaque</p>	<p><b>Overall Height</b> 14=14" 20=20" 24=24" 30=30" Other heights available</p>	<p><b>Option</b> 2=Frangible coupling with 2" thread for 1" dia. column</p>
<p><b>Wattage</b> 120=120W 200=200W</p>			

Example: 213Q-1-200-RG-24 is a 213Q fixture with 1" column, 200W lamp, red/green and 24" overall height

## Head Assemblies

Includes housing, socket, cord, gasket and lens clamp.

#213Q-X ..... Quartz  
X = Overall height of fixture -14", 20", 24" or 30" - other heights available.

## Lamp Socket

#73Q ..... Quartz

## Outer Lenses

#248Q ..... Clear  
#248Q-CO ..... Clear/Opaque\*  
#248Q-OC ..... Opaque/Clear\*  
#256Q-GR ..... Green/Red\*  
#256Q-RG ..... Red/Green\*

\* Toe direction must be specified. Looking at the fixture from the runway centerline the color on the left is listed first, followed by the color on the right.

## 180° Inner Lenses

#57Q-B ..... Blue  
#57Q-C ..... Clear  
#57Q-G ..... Green  
#57Q-R ..... Red  
#57Q-Y ..... Yellow

## Lamps

#103 ..... 120W Quartz  
#105 ..... 200W Quartz

## Connector Cords

#76Q-X ..... Quartz  
X = Overall height of fixture -14", 20", 24" or 30" - other heights available


## Columns

#77 ..... 6" (14" overall height of fixture)  
#78 ..... 12" (20" overall height of fixture)  
#78-16 ..... 16" (24" overall height of fixture)  
#79 ..... 22" (30" overall height of fixture)

Other heights available

## Other

#60Q ..... Lens Clamp  
#63Q ..... Lens Gasket

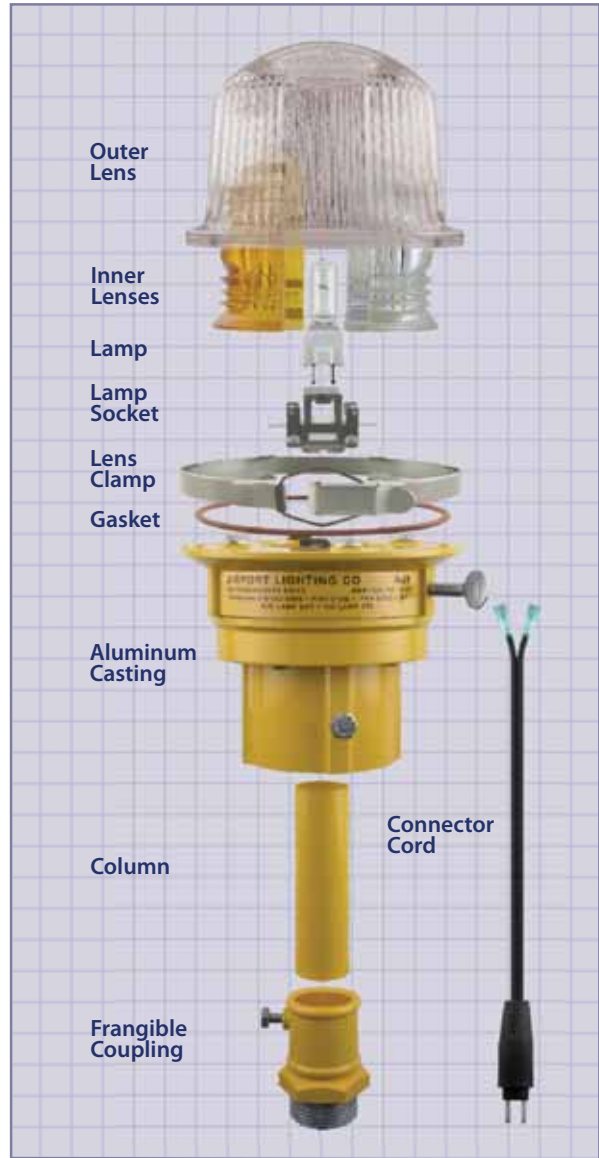

## Other (con't)

#58 ..... Frangible Coupling  
1.5" thread for 1" dia. column  
#58-2 ..... Frangible Coupling  
2" thread for 1" dia. column  
#59 ..... Frangible Coupling  
2" thread for 2" EMT column (14" overall height only)  
#59-E-P ..... Frangible Coupling  
2" thread for 2" EMT. column (overall heights greater than 14")

## Accessories

L-830-4 100W Transformer  
L-830-6 200W Transformer  
L-823 Primary Connector Kit  
L-867B 12" diameter light base  
L-867B 12" diameter baseplate

